

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number  
**WO 2004/020895 A3**

(51) International Patent Classification<sup>7</sup>: **F16L 55/16**  
(21) International Application Number:  
PCT/US2003/024779

(22) International Filing Date: 8 August 2003 (08.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/407,442 30 August 2002 (30.08.2002) US

(71) Applicant (for all designated States except US): ENVENTURE GLOBAL TECHNOLOGY [US/US]; 16200 A Park Row, Houston, TX 77084 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): COOK, Robert, Lance [US/US]; 934 Caswell Court, Katy, TX 77450 (US).

(74) Agent: MATTINGLY, Todd; Haynes and Boone, LLP, Suite 4300, 1000 Louisiana St., Houston, TX 77002-5012 (US).


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF MANUFACTURING AN INSULATED PIPELINE

(57) Abstract: A method of manufacturing an insulated pipeline.

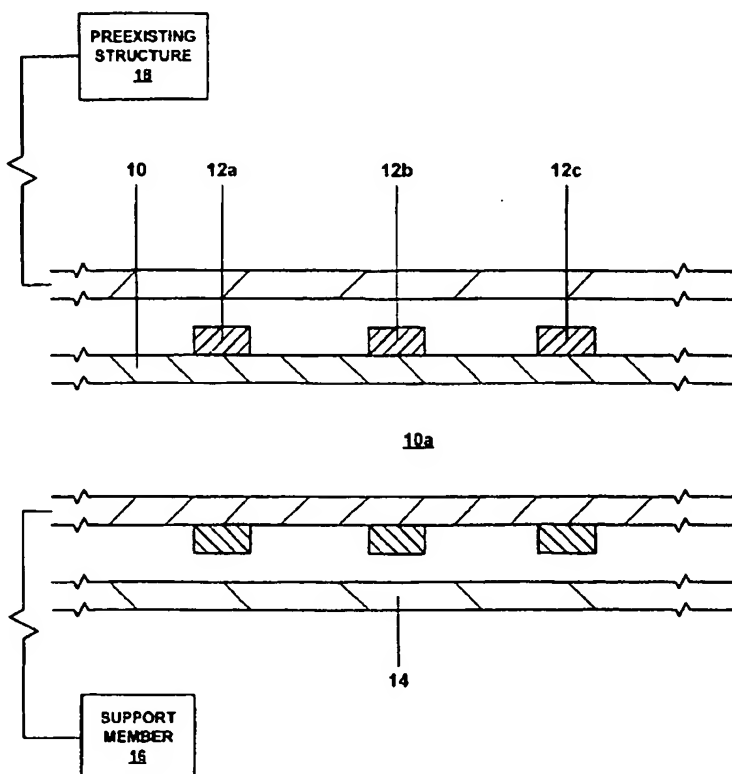

WO 2004/020895 A3

BEST AVAILABLE COPY

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/24779

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : F16L 55/16

US CL : 138/98, 97, 114, 148, 149 ; 29/421.2

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 138/98, 97, 114, 148, 149; 29/421.2, 421.1, 402.09, 890.036

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5,400,827 A (BARO et al) 28 March 1995 (28.03.1995), see entire document.	1-30
A	US 5,368,075 A (BARO et al) 29 November 1994 (29.11.1994), see entire document.	1-30
A	US 3,781,966 A (LIEBERMAN) 01 January 1974 (01.01.1974), see entire document.	1-30
A	US 4,505,017 A (SCHUKEI) 19 March 1985 (19.03.1985), see entire document.	1-30

☐ Further documents are listed in the continuation of Box C.

☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T"

later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X"

document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y"

document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&"

document member of the same patent family

Date of the actual completion of the international search

04 November 2003 (04.11.2003)

Date of mailing of the international search report

03 MAR 2004

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US  
Commissioner for Patents  
P.O. Box 1450  
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Patrick F. Brinson

Telephone No. (703) 308-0861

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number  
**WO 2004/020895 A3**

(51) International Patent Classification<sup>7</sup>: F16L 55/16

(21) International Application Number:  
PCT/US2003/024779

(22) International Filing Date: 8 August 2003 (08.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/407,442 30 August 2002 (30.08.2002) US

(71) Applicant (for all designated States except US): ENVEN-  
TURE GLOBAL TECHNOLOGY [US/US]; 16200 A  
Park Row, Houston, TX 77084 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): COOK, Robert,  
Lance [US/US]; 934 Caswell Court, Katy, TX 77450  
(US).


(74) Agent: MATTINGLY, Todd; Haynes and Boone, LLP,  
Suite 4300, 1000 Louisiana St., Houston, TX 77002-5012  
(US).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE,  
SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ,  
VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD OF MANUFACTURING AN INSULATED PIPELINE

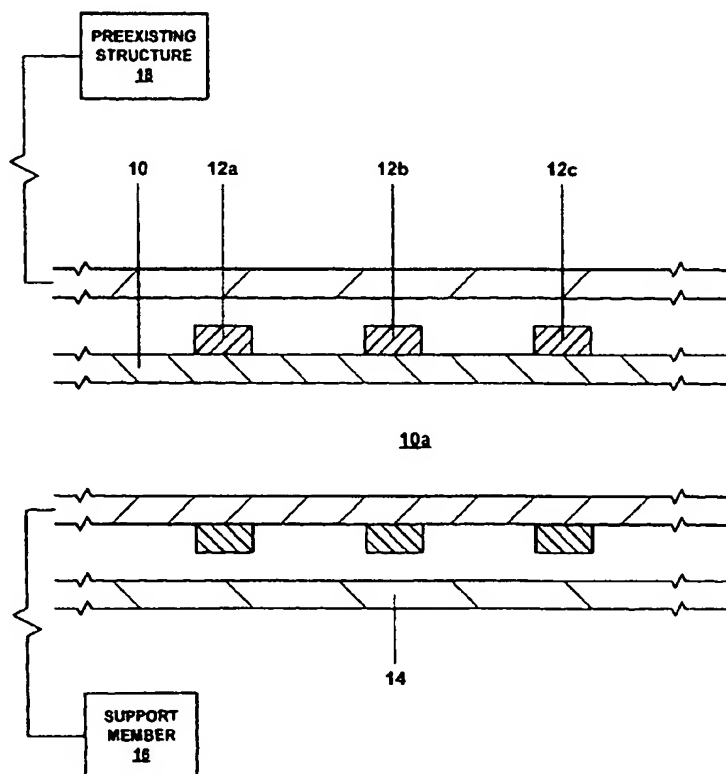

(57) Abstract: A method of manu-  
facturing an insulated pipeline.

WO 2004/020895 A3

**Date of publication of the amended claims:** 3 June 2004

- Date of publication of the amended claims:** 3 June 2004

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

15 April 2004

15 April 2004

## AMENDED CLAIMS

[received by the International Bureau on 22 April 2004 (22.04.04) ;

New claims 31-51 have been added. (11 pages).]

1. A method of manufacturing an insulated pipeline, comprising:  
positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe; and  
radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe.
2. The method of claim 1, further comprising:  
injecting an insulating material into an annulus defined between the first and second pipes.
3. The method of claim 2, wherein injecting the insulating material into the annulus defined between the first and second pipes comprises:  
injecting the insulating material into the annulus defined between the first and second pipes before radially expanding and plastically deforming the first pipe.
4. The method of claim 2, wherein injecting the insulating material into the annulus defined between the first and second pipes comprises:  
injecting the insulating material into the annulus defined between the first and second pipes after radially expanding and plastically deforming the first pipe.
5. The method of claim 1, wherein the first pipe further comprises:  
a plurality of thermal insulating sleeves coupled to the exterior surface of the first pipe and interleaved among the resilient sleeves.
6. The method of claim 1, wherein positioning the first pipe having the plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the second pipe comprises:  
positioning the second pipe beneath a body of water; and  
positioning the first pipe having the plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the second pipe.
7. A system for manufacturing an insulated pipeline, comprising:  
means for positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe; and

means for radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe.

8. The system of claim 7, further comprising:

means for injecting an insulating material into an annulus defined between the first and second pipes.

9. The system of claim 8, wherein means for injecting the insulating material into the annulus defined between the first and second pipes comprises:

means for injecting the insulating material into the annulus defined between the first and second pipes before radially expanding and plastically deforming the first pipe.

10. The system of claim 8, wherein means for injecting the insulating material into the annulus defined between the first and second pipes comprises:

means for injecting the insulating material into the annulus defined between the first and second pipes after radially expanding and plastically deforming the first pipe.

11. The system of claim 7, wherein the first pipe further comprises:

a plurality of thermal insulating sleeves coupled to the exterior surface of the first pipe and interleaved among the resilient sleeves.

12. The system of claim 7, wherein means for positioning the first pipe having the plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the second pipe comprises:

means for positioning the second pipe beneath a body of water; and

means for positioning the first pipe having the plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the second pipe.

13. A method of manufacturing an insulated pipeline comprising an inner rigid pipe positioned within, coupled to, and thermally insulated from an outer rigid pipe, comprising:

manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe.

14. The method of claim 13, further comprising:

positioning the outer rigid pipe at a location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and

manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which

the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe.

15. The method of claim 14, wherein the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

16. A system for manufacturing an insulated pipeline comprising an inner rigid pipe positioned within, coupled to, and thermally insulated from an outer rigid pipe, comprising:  
means for manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe.

17. The system of claim 16, further comprising:  
means for positioning the outer rigid pipe at a location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and  
means for manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe.

18. The system of claim 17, wherein the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

19. A thermally insulated pipeline, comprising:  
a plastically deformed first pipe;  
a plurality of spaced apart resilient sleeves coupled to the exterior of the first pipe; and  
a second pipe coupled to the resilient sleeves.

20. The insulated pipeline of claim 19, further comprising:  
thermal insulating material positioned within an annulus defined between the first and second pipes and interleaved among the resilient sleeves.

21. The insulated pipeline of claim 20, wherein one or more of the resilient sleeves include one or more longitudinal passages.

22. The insulated pipeline of claim 21, wherein at least some of the thermal insulating material is positioned within the longitudinal passages.



23. A method of operating a hydrocarbon production system for processing hydrocarbons that includes one or more hydrocarbon production sources and one or more hydrocarbon production destinations, comprising:

conveying hydrocarbons between the hydrocarbon production sources and the hydrocarbon destinations using one or more insulated pipelines; and

manufacturing at least one of the insulated pipelines by radially expanding and plastically deforming an inner rigid pipe within an outer rigid pipe.

24. The method of claim 23, further comprising:

positioning the outer rigid pipe at a location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and

manufacturing the at least one insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe.

25. The method of claim 24, wherein the location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

26. A method of manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing; and

radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe.

27. The method of claim 26, further comprising:

injecting an insulating material into an annulus defined between the first and second wellbore casings.

28. The method of claim 27, wherein injecting the insulating material into the annulus defined between the first and second wellbore casings comprises:

injecting the insulating material into the annulus defined between the first and second wellbore casings before radially expanding and plastically deforming the second wellbore casing.

29. The method of claim 27, wherein injecting the insulating material into the annulus defined

between the first and second wellbore casings comprises:

injecting the insulating material into the annulus defined between the first and second wellbore casings after radially expanding and plastically deforming the second wellbore casing.

30. The method of claim 26, wherein the second wellbore casing further comprises:  
a plurality of thermal insulating sleeves coupled to the exterior surface of the second wellbore casing and interleaved among the resilient sleeves.

31. A method of manufacturing an insulated pipeline, comprising:  
positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;  
radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and  
injecting an insulating material into the annulus defined between the first and second pipes before radially expanding and plastically deforming the first pipe.

32. A method of manufacturing an insulated pipeline, comprising:  
positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;  
radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and  
injecting an insulating material into the annulus defined between the first and second pipes after radially expanding and plastically deforming the first pipe.

33. A method of manufacturing an insulated pipeline, comprising:  
positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;  
radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and  
injecting an insulating material into the annulus defined between the first and second pipes before and after radially expanding and plastically deforming the first pipe.

34. A method of manufacturing an insulated pipeline, comprising:  
positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe; and  
radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior

surface of the second pipe; and  
injecting an insulating material into the annulus defined between the first and second pipes;  
wherein the first pipe further comprises a plurality of thermal insulating sleeves coupled to the exterior surface of the first pipe and interleaved among the resilient sleeves.

35. A method of manufacturing an insulated pipeline, comprising:  
positioning a first pipe beneath a body of water;  
positioning a second pipe having the plurality of spaced apart resilient sleeves coupled to the exterior surface of the second pipe within the first pipe;  
radially expanding and plastically deforming the second pipe until the resilient sleeves engage the interior surface of the first pipe; and  
injecting an insulating material into the annulus defined between the first and second pipes;  
wherein the second pipe further comprises a plurality of thermal insulating sleeves coupled to the exterior surface of the first pipe and interleaved among the resilient sleeves.

36. A system for manufacturing an insulated pipeline, comprising:  
means for positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;  
means for radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and  
means for injecting an insulating material into the annulus defined between the first and second pipes before radially expanding and plastically deforming the first pipe.

37. A system for manufacturing an insulated pipeline, comprising:  
means for positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;  
means for radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and  
means for injecting an insulating material into the annulus defined between the first and second pipes after radially expanding and plastically deforming the first pipe.

38. A system for manufacturing an insulated pipeline, comprising:  
means for positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;  
means for radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and

means for injecting an insulating material into the annulus defined between the first and second pipes before and after radially expanding and plastically deforming the first pipe.

39. A system for manufacturing an insulated pipeline, comprising:

means for positioning a first pipe having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within a second pipe;

means for radially expanding and plastically deforming the first pipe until the resilient sleeves engage the interior surface of the second pipe; and

means for injecting an insulating material into the annulus defined between the first and second pipes; wherein the first pipe further comprises a plurality of thermal insulating sleeves coupled to the exterior surface of the first pipe and interleaved among the resilient sleeves.

40. A system for manufacturing an insulated pipeline, comprising:

means for positioning a first pipe beneath a body of water;

means for positioning a second pipe having the plurality of spaced apart resilient sleeves coupled to the exterior surface of the second pipe within the first pipe;

means for radially expanding and plastically deforming the second pipe until the resilient sleeves engage the interior surface of the first pipe; and

means for injecting an insulating material into the annulus defined between the first and second pipes; wherein the second pipe further comprises a plurality of thermal insulating sleeves coupled to the exterior surface of the first pipe and interleaved among the resilient sleeves.

41. A method of manufacturing an insulated pipeline comprising an inner rigid pipe positioned within, coupled to, and thermally insulated from an outer rigid pipe, comprising:

manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe;

positioning the outer rigid pipe at a location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and

manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe;

wherein the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

42. A system for manufacturing an insulated pipeline comprising an inner rigid pipe positioned within, coupled to, and thermally insulated from an outer rigid pipe, comprising:

means for manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe;

means for positioning the outer rigid pipe at a location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and

means for manufacturing the insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe;

wherein the location at which the insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

43. A thermally insulated pipeline, comprising:

a plastically deformed first pipe;

a plurality of spaced apart resilient sleeves coupled to the exterior of the first pipe;

a second pipe coupled to the resilient sleeves; and

thermal insulating material positioned within an annulus defined between the first and second pipes and interleaved among the resilient sleeves;

wherein one or more of the resilient sleeves include one or more longitudinal passages; and

wherein at least some of the thermal insulating material is positioned within the longitudinal passages.

44. A method of operating a hydrocarbon production system for processing hydrocarbons that includes one or more hydrocarbon production sources and one or more hydrocarbon production destinations, comprising:

conveying hydrocarbons between the hydrocarbon production sources and the hydrocarbon destinations using one or more insulated pipelines;

manufacturing at least one of the insulated pipelines by radially expanding and plastically deforming an inner rigid pipe within an outer rigid pipe;

positioning the outer rigid pipe at a location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and

manufacturing the at least one insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe;

wherein the location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

45. A method of manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing;

radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe; and

injecting the insulating material into the annulus defined between the first and second wellbore casings before radially expanding and plastically deforming the second wellbore casing.

46. A method of manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing;

radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe; and

injecting the insulating material into the annulus defined between the first and second wellbore casings after radially expanding and plastically deforming the second wellbore casing.

47. A method of manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing;

radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe; and

injecting the insulating material into the annulus defined between the first and second wellbore casings after radially expanding and plastically deforming the second wellbore casing;

wherein the second wellbore casing further comprises a plurality of thermal insulating sleeves coupled to the exterior surface of the second wellbore casing and interleaved among the resilient sleeves.

48. An hydrocarbon production system for processing hydrocarbons that includes one or more hydrocarbon production sources and one or more hydrocarbon production destinations, comprising:  
means for conveying hydrocarbons between the hydrocarbon production sources and the hydrocarbon destinations using one or more insulated pipelines;

means for manufacturing at least one of the insulated pipelines by radially expanding and plastically deforming an inner rigid pipe within an outer rigid pipe;

means for positioning the outer rigid pipe at a location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe; and

means for manufacturing the at least one insulated pipeline by radially expanding and plastically deforming the inner rigid pipe within the outer rigid pipe while the inner and outer rigid pipes are both positioned at the location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe;

wherein the location at which the at least one insulated pipeline will be used to convey fluidic materials through the interior of the first pipe is below a body of water.

49. A system for manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

means for positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing;

means for radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe; and

means for injecting the insulating material into the annulus defined between the first and second wellbore casings before radially expanding and plastically deforming the second wellbore casing.

50. A system for manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

means for positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing;

means for radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe; and

means for injecting the insulating material into the annulus defined between the first and second wellbore casings after radially expanding and plastically deforming the second wellbore casing.

51. A system for manufacturing an insulated wellbore casing within a borehole that traverses a subterranean formation and includes a first wellbore casing coupled to and positioned within the wellbore, comprising:

means for positioning a second wellbore casing having a plurality of spaced apart resilient sleeves coupled to the exterior surface of the first pipe within the first wellbore casing;

means for radially expanding and plastically deforming the second wellbore casing until the resilient sleeves engage the interior surface of the second pipe; and  
means for injecting the insulating material into the annulus defined between the first and second wellbore casings after radially expanding and plastically deforming the second wellbore casing;  
wherein the second wellbore casing further comprises a plurality of thermal insulating sleeves coupled to the exterior surface of the second wellbore casing and interleaved among the resilient sleeves.



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**